

NEFMAX

NFH0416
RELAY
CONTROL
UNIT



POWERED BY
FERVES[®]
TECHNOLOGY



⚡ 12 Volt input

📡 Bway rs-485 communication protocol













🔌 16 outputs (each output can be switched up to 16 a.)

👉 16 programmable functional digital button input


📶 Wifi / ethernet supported

🧠 Memory saving feature

📶 Thanks to its special hardware design, wifi, ethernet and ir control modules can be added to the device.

-  Reverse feed protection circuit
-  Instant peak protection resistant to rapid voltage changes
-  Emf filter that destroys electromagnetic waves in the outdoor environment
-  Ptc short circuit protection
-  Terminal block, resistant up to 16-20 A., Reinforcing the cable connection
Thanks to its special screw design
-  5.08mm detachable terminal block with 4 pin and 10 pin
-  Dimensions: 31 x 9 x 3 cm
-  Weight: 0.48 kg
-  Ear design suitable for easy installation
-  Anodized coating resistant to corrosion, scratches and mechanical effects
-  Aluminum raw material lightweight case
-  Uv printing resistant to scratch and fading



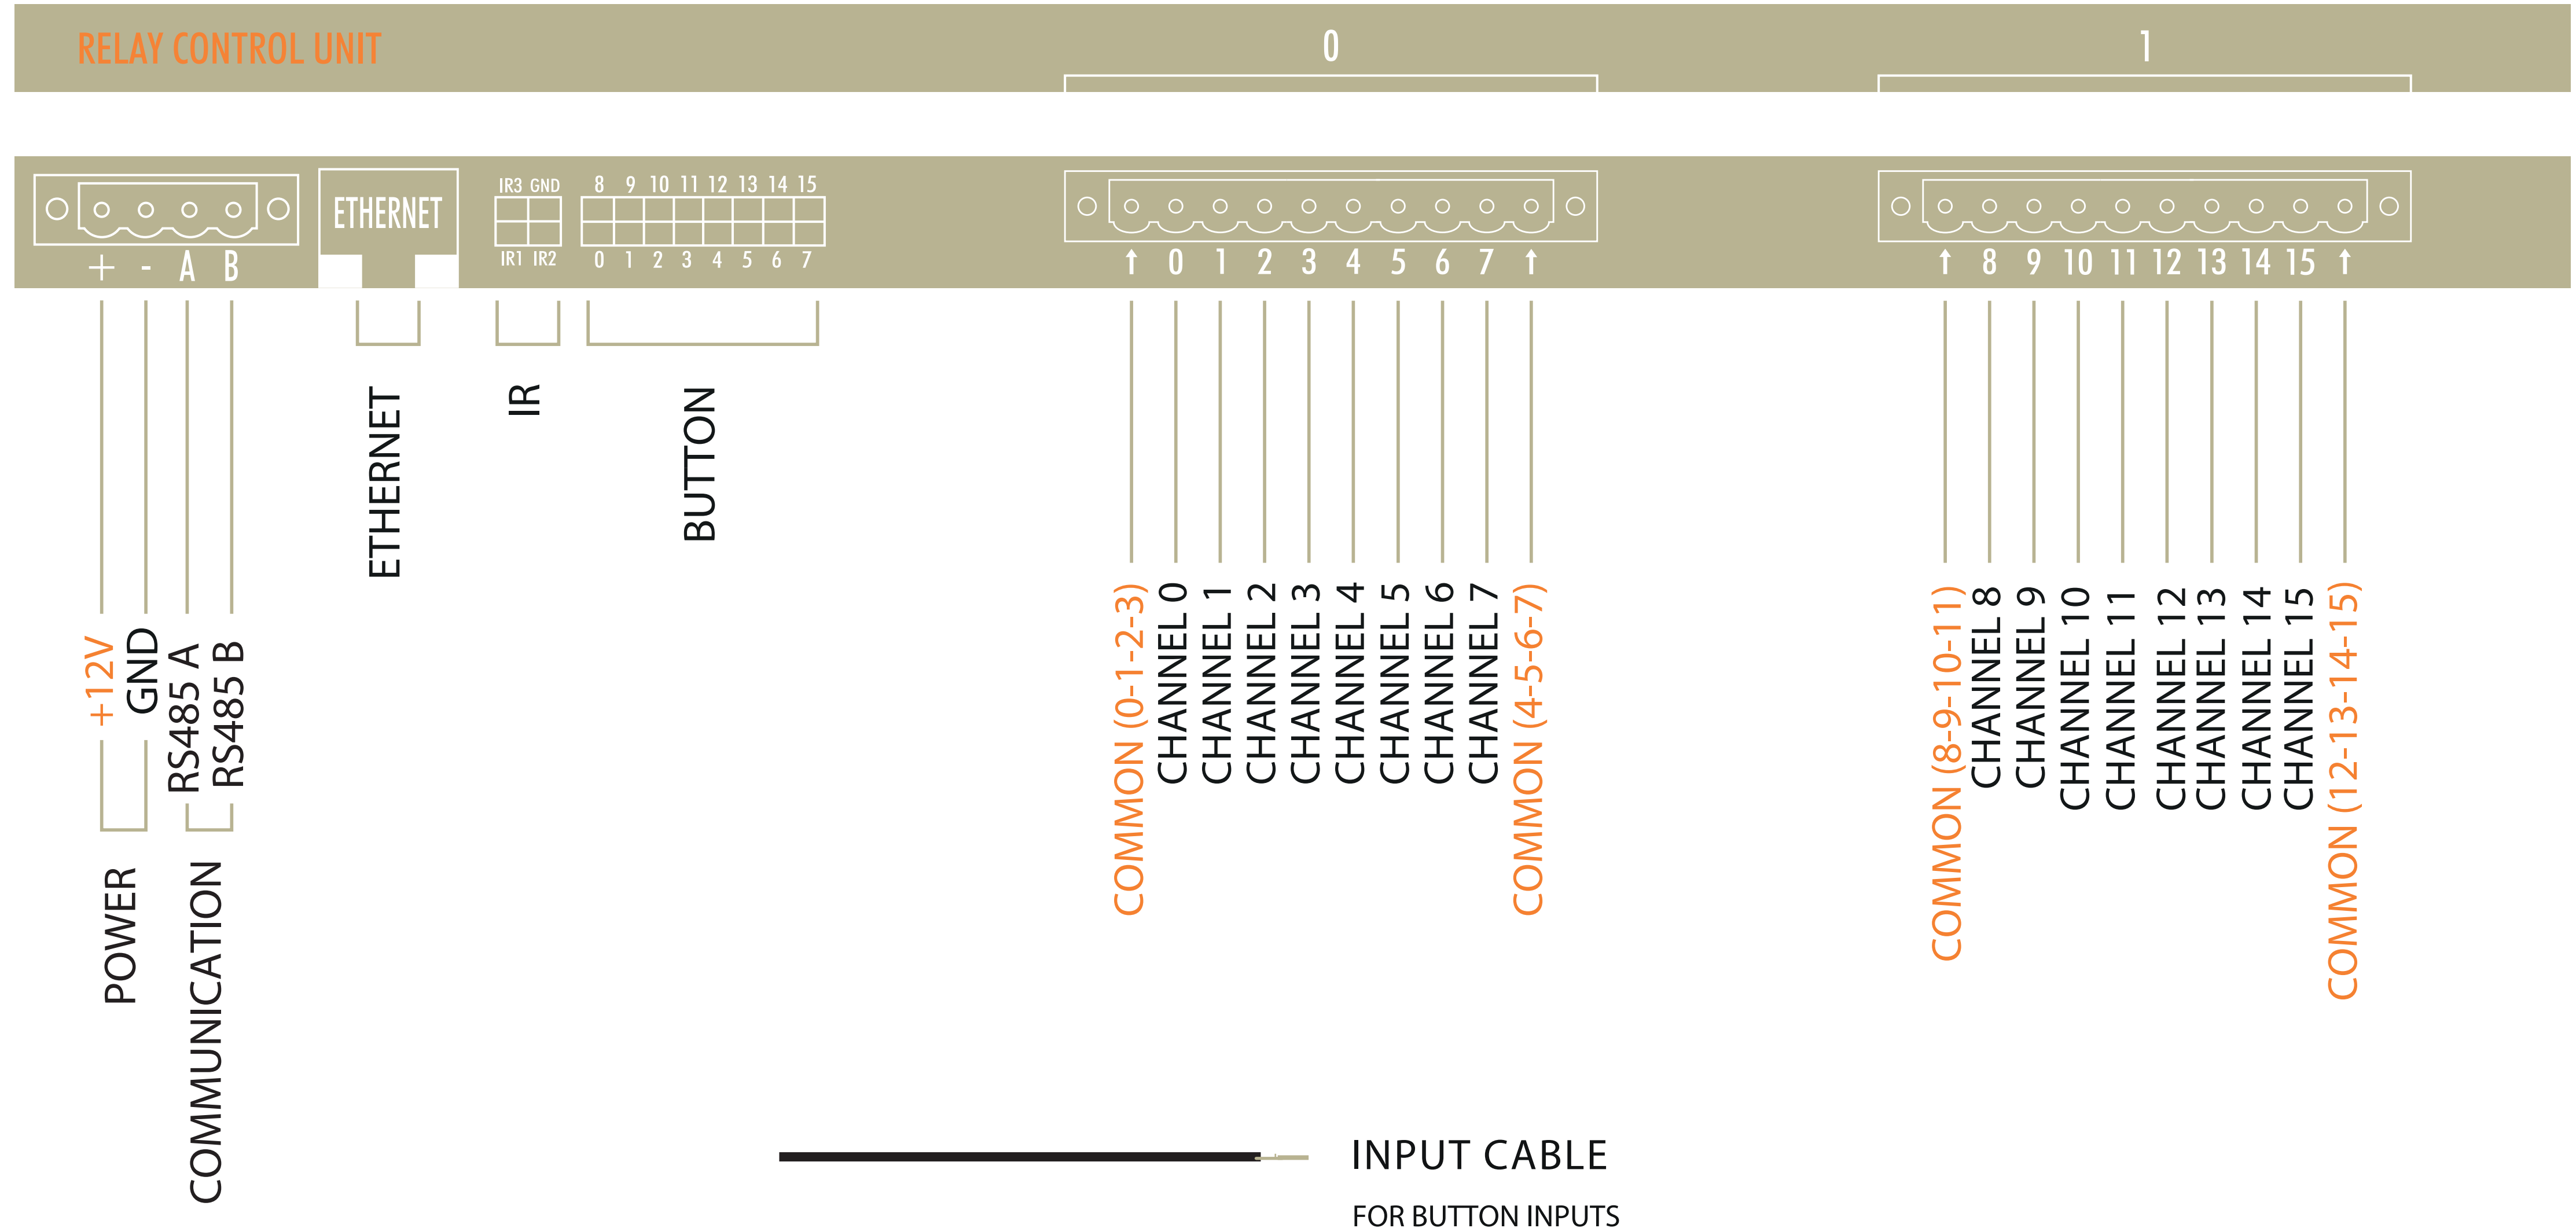

FERVES TEKNOLOJI A.S

📍 KISIKLI MAH. YILDIRAN SK. NO:8 34692 USKUDAR / ISTANBUL TURKIYE

☎ +90 216 344 00 55

✉ sales@ferves.com

🌐 www.ferves.com

FERVES
TECHNOLOGY



@fervesteknoloji



+90 (216) 344 00 55



@fervesteknoloji



@fervesteknoloji



@fervesteknoloji